


PARA

TEMPOTEST  MARINE®

ITALIAN PERFORMANCE FABRICS

TEMPOTESTUSA.COM

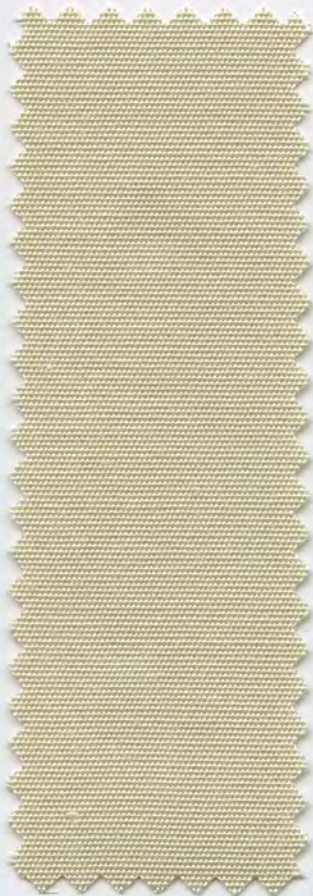

Cream
 T15/1-60



Beige
 T52-60




White
 T15-60



Snow
 T15/93-60



Latte
 T15/52-60




Oyster
 T15/14-60




Cappuccino
 T102-60




Toast
 T101-60




Mist
 T15/79-60




Silver
 T79-60




Grey
 T94-60




Charcoal
 T97-60



Silver Tweed
 T407/79-60



Driftwood Tweed
 T407/926-60



Driftwood
 T926-60



Toffee
 T106-60



Powder Blue
 T21-60



Shoreline
 T22-60



Pacific Blue
 T416-60



Intense Blue
 T414-60



Royal Blue Tweed
T407/13-60



Navy
T75-60




Indigo
T92-60




Red [P]
T11-60




Brick [P]
T426-60




Maroon [P]
T415-60




Burgundy [P]
T73-60



Red Tweed [P]
T407/11-60



Chocolate
T81-60




Beige Tweed
T407/52-60




Sunflower [P]
T12-60



Forest Green
T5-60



Forest Tweed
T407/6-60



Black
T24-60

TECHNICAL FEATURES

Composition

100% solution dyed
outdoor acrylic fiber

Warp

79 ends/inch count Ne 20/2

Weft

36 picks/inch count Ne 20/2

Width

60 inch

Weight

8.8 oz/sq. yard (+/- 5%)

Water column - UNI EN 20811

> 38 cm

Spray test - UNI EN 24920

5 (100)

Color fastness

UNI EN ISO 105 B04: 2000

7/8 degree (blue scale)

4/5 degree (grey scale)

Breaking Load

UNI EN ISO 13934-1

Warp: 1700 Newton - Elongation: 30.5%

Weft: 1000 Newton - Elongation: 24.5%


Finishing

Soil-resistant, mold-resistant, oil and
water repellent with Teflon™ finishing

Warranty

10-year warranty




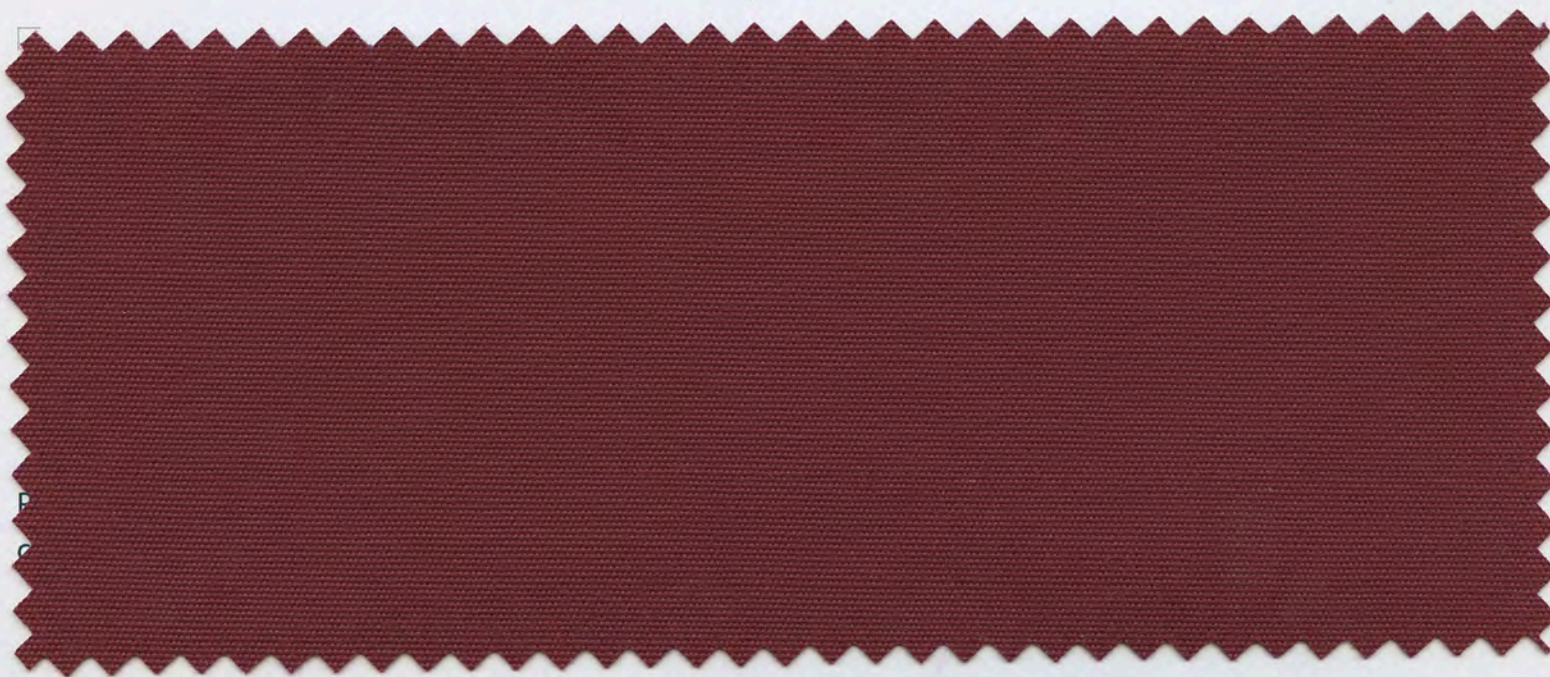


White
T15-60C




Snow
T15/93-60C

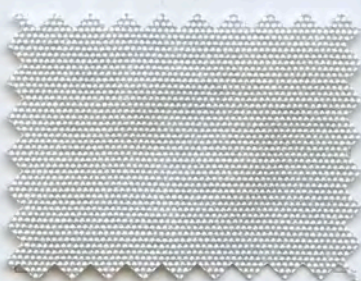


Mist
T15/79-60C

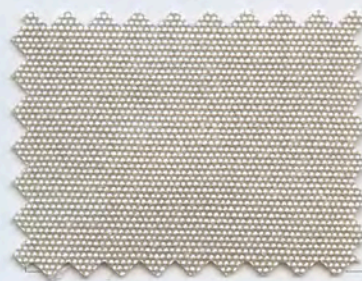


Oyster
T15/14-60C

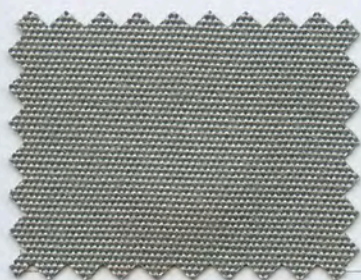

Grey
T94-60C

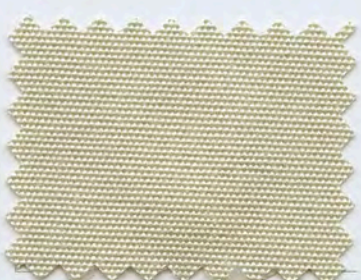

Cream
T15/1-60C

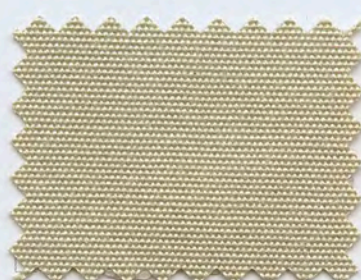

Beige
T52-60C




Red [P]
T11-60C



Maroon [P]
T415-60C



Forest Green
T5-60C

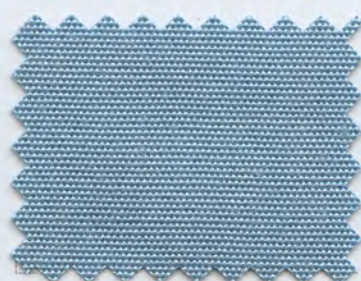

Powder Blue
T21-60C




Pacific Blue
T416-60C



Navy
T75-60C



Indigo
T92-60C

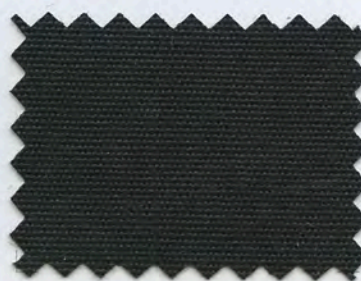

Black
T24-60C


Part #-60 = uncoated 60"

Part #-60C = coated 60"

[P]=Premium color

TEMPOTEST MARINE[®] COATED is used for manufacturing boat covers as well as sunshades, with omni-directional tension resistance. It is the ideal fabric for waterproof marine applications.

TEMPOTEST MARINE[®] COATED was tested for 2 years in Scandinavian winter sea conditions and demonstrated complete dimensional stability even where ice formation was present.

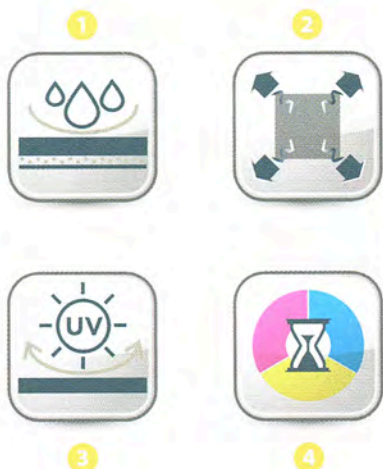

1 WATERPROOF

The transparent acrylic resin coat on one side waterproofs the fabric, passing the 1000 mm / 39" water column test.

2 DIMENSIONAL STABILITY

The special construction gives an extraordinary omni-directional, and especially longitudinal, dimensional stability.

UV RESISTANT

3 UV rays are filtered by the fabric which protects objects and materials, but above all people and their skin. All TEMPOTEST COATED[®] colors have a high UPF value.

HIGH COLOR FASTNESS

4 The solution dyed acrylic fiber allows these fabrics to keep their color unchanged over time, while subjected to the most invasive atmospheric agents, such as sun, wind, rain and salt.



Active biocidal substance:
Octylisothiazolinone.

TECHNICAL FEATURES

Composition

100% solution dyed outdoor acrylic fiber

Width

60 inch

Weight

9.7 oz/sq. yard (+/- 5%)

Water column - UNI EN 20811

> 100 cm

Breaking Load UNI EN ISO 13934-1

Warp: 1700 Newton - Elongation: 32.5%

Weft: 1100 Newton - Elongation: 30.5%

Finishing

Soil-resistant, mold-resistant, oil and water repellent with Teflon[™] finishing

Warranty

10-year warranty




It is recommended to put the coated side inside





- HIGH COLOR FASTNESS
- WIDE RANGE OF COLORS
- BREATHABLE
- VERSATILE

- BOAT COVERS
- BIMINI TOPS
- SUN SHADES
- SPRAYHOODS
- ENCLOSURES

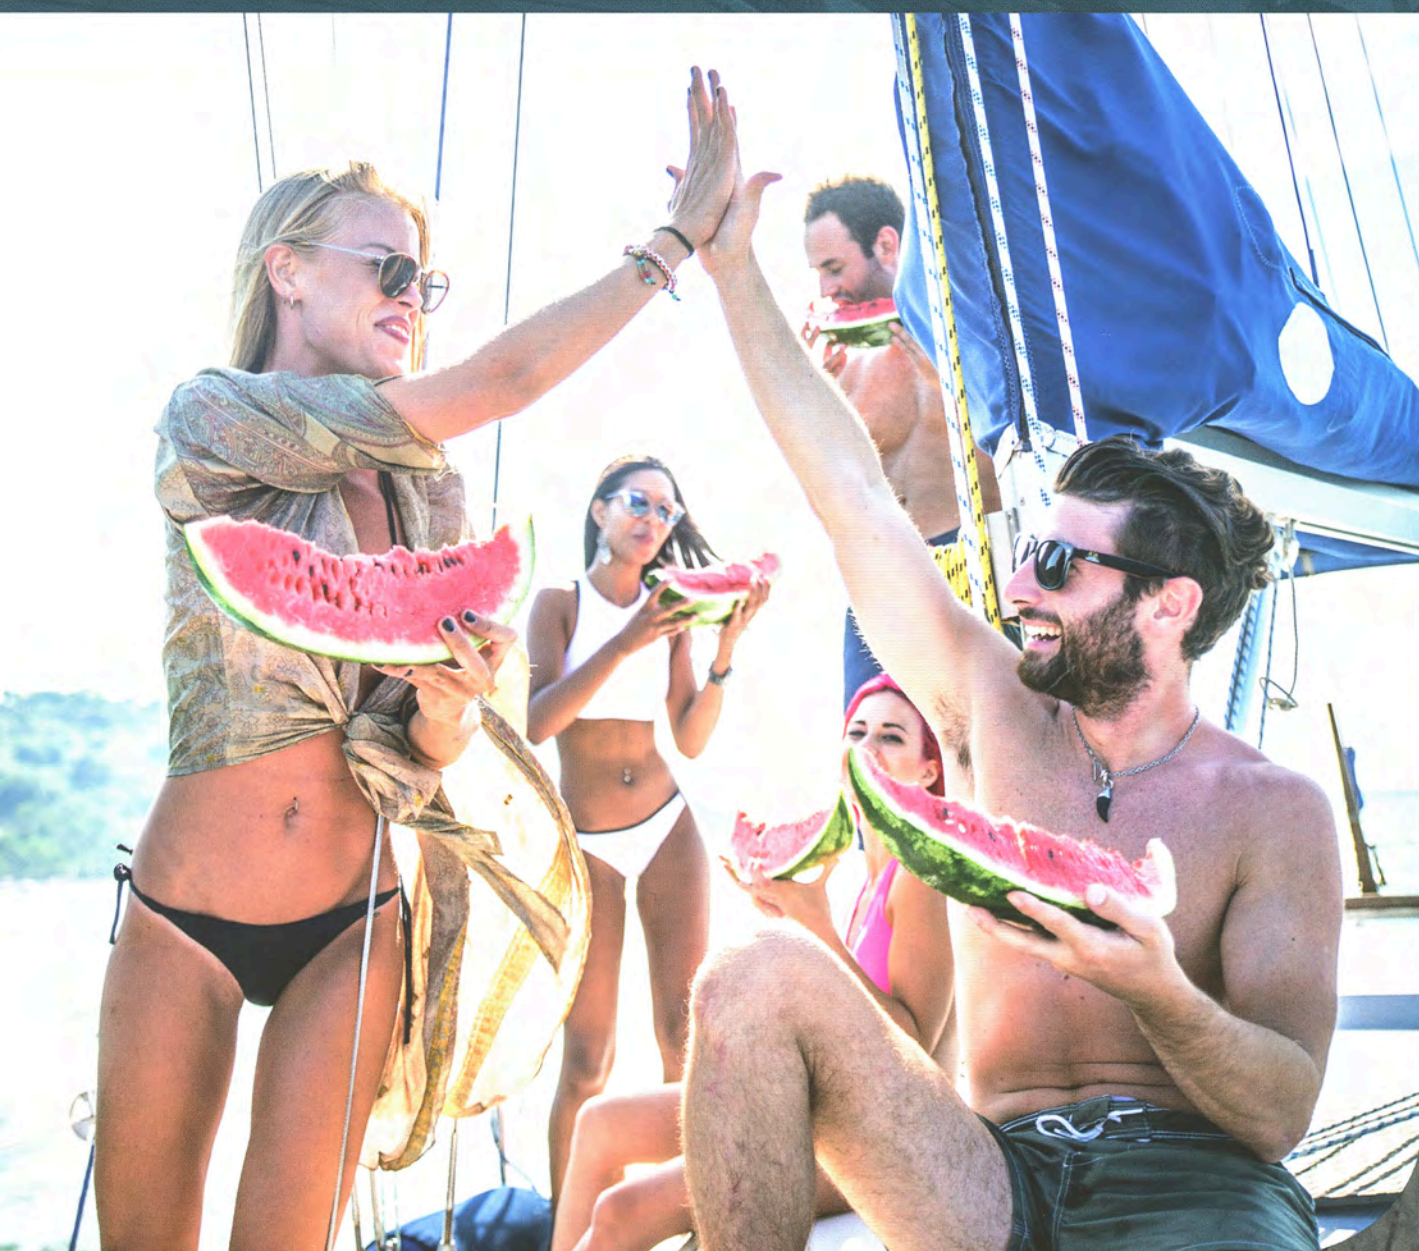

PARA
TEMPOTEST®
ITALIAN PERFORMANCE FABRICS

Distributed Exclusively By:



THE **miami**™
CORPORATION

www.miamicorp.com

800.543.0448

Applications Include:

Marine

Awning & Shade

Phone: 800.543.0448 | Web: miamicorp.com